
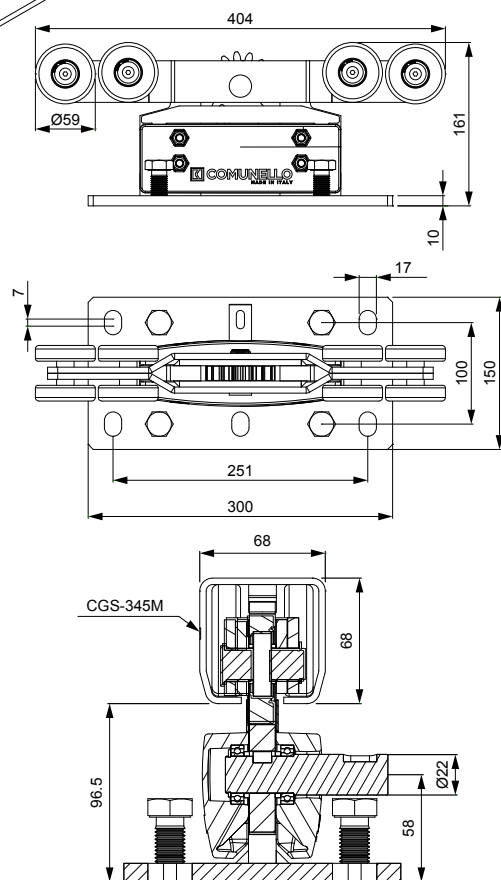


CGS-500.8 M

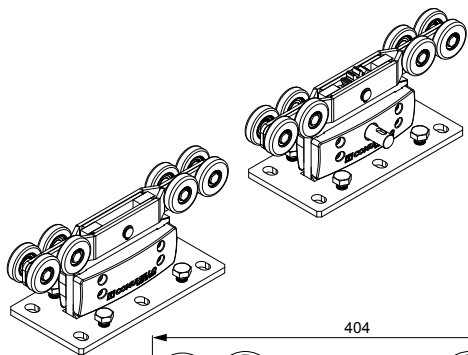

ENGLISH:

USE: Carriages with integrated transmission for cantilever gates.

TYPE: 8 wheel Integrator Master & Slave carriages kit.

FIXING: Use 6 + 6 anchor bolts CG-348 M16 or appropriate anchors (both not supplied). For the dimensions of the concrete base, see table 1. The base allows height adjustment using the 4 M16 screws and the special counter-plate CG-05.

MATERIAL: Electrolytically Galvanized Steel and Painted Aluminum.

RECYCLING: Dispose of the main structure (wheels, plates and pins) as ferrous material and the side protections as aluminum, according to the laws of the country of installation.


PARTS SUBJECT TO WEAR: Bearings, wheels and gears.

WARNINGS: The manufacturer reserves the right to change the characteristics of the product according to their needs without prior notice. The manufacturer is not liable for even partial modifications of the product and the declared performances are valid only if the installation methods indicated in the instructions and performed by qualified personnel are followed.


TECHNICAL CHARACTERISTICS

TECHNICAL CHARACTERISTICS				
WEIGHT OF PART			47.3 Lbs / 21.5 Kg	
CAPACITY (maximum force on the carriage axis), IT IS NOT THE WEIGHT OF THE GATE			F1 max 2640 Lb/f 1200 Kg/f	
COMBINABLE COMPONENTS			CGS-345M	
MAINTENANCE FREQUENCY				
PRIVATE HOME	BUSINESS	WAREHOUSE	CONDOMINIUM <20 UNITS	CONDOMINIUM >20 UNITS
2 YEAR*	2 YEAR*	1 YEAR*	6 MONTHS*	6 MONTHS*
Check the functionality and integrity of carriages.				
Clean lower area of contact between wheels and rail				
Make sure the carriages are integral with the concrete base				
Grease the gears with the appropriate grease (FIG.4)				
Check gears and racks wear				
Check fastening of the locking screws of the rack to the monorail				
*The scheme refers to a normal workplace (not marine or particularly aggressive environments).				

Art.		Code		Kg
CGS-500.8 M	MINI			

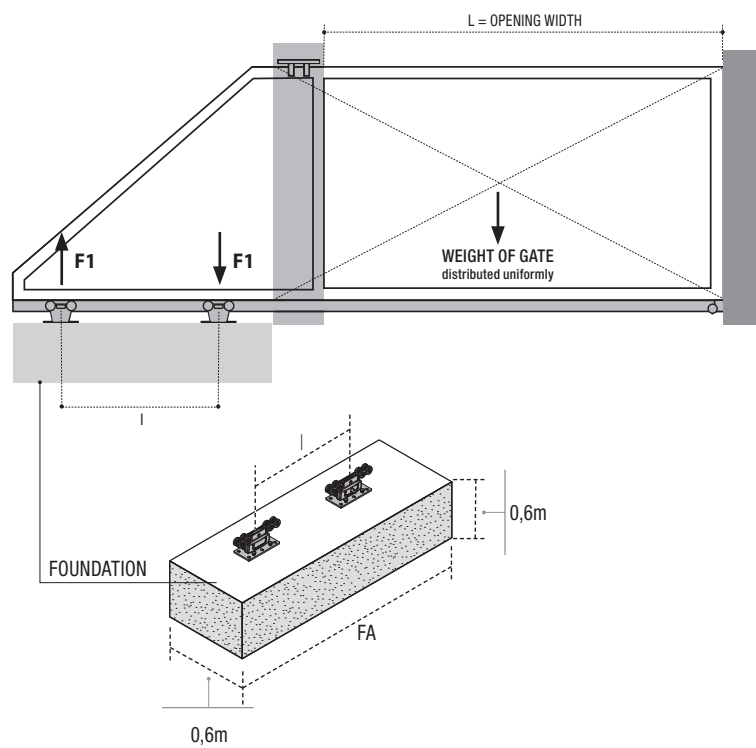

CG-05M
CG-10
CG-348 M16

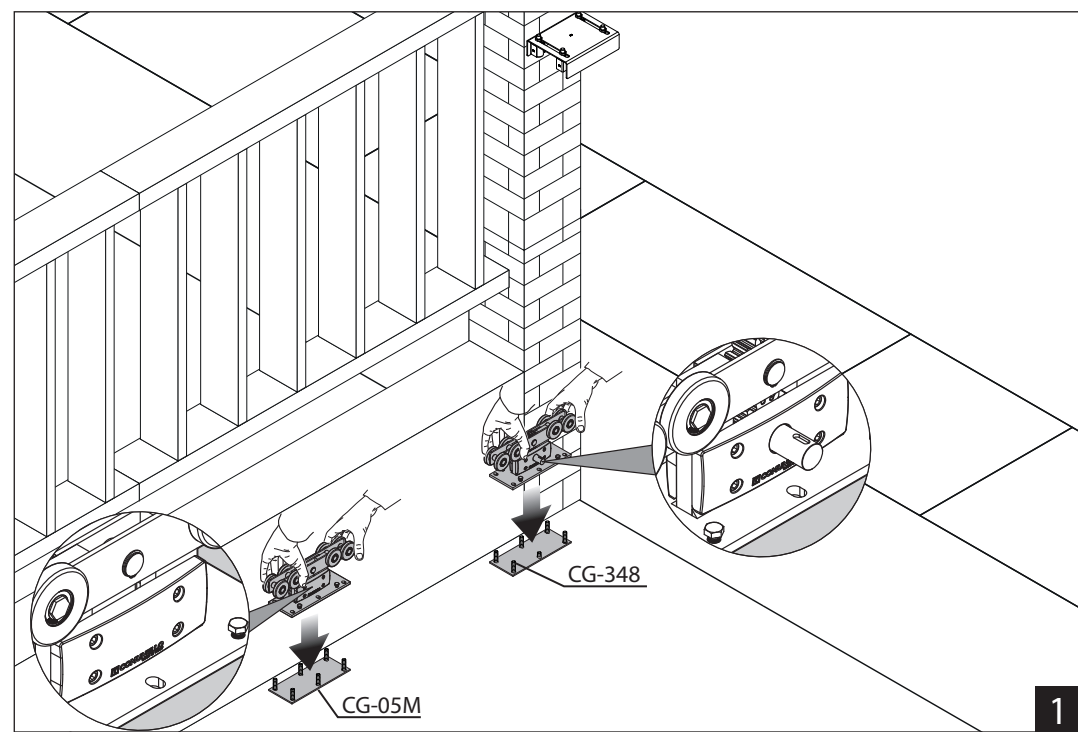

TAB.01

WEIGHT (Kg)	CSG - 500.8 M (F1max=1200 Kg)											
	L=2 m		L=3 m		L=4 m		L=5 m		L=6 m		L=7 m	
	FA [m]	I [m]	FA [m]	I [m]	FA [m]	I [m]	FA [m]	I [m]	FA [m]	I [m]	FA [m]	I [m]
100	1.2	0.5	1.5	0.8	1.7	1.0	2.0	1.3	2.2	1.5	2.5	1.8
150	1.2	0.5	1.5	0.8	1.7	1.0	2.0	1.3	2.2	1.5	2.5	1.8
200	1.2	0.5	1.5	0.8	1.7	1.0	2.0	1.3	2.2	1.5	2.5	1.8
250	1.2	0.5	1.5	0.8	1.7	1.0	2.0	1.3	2.2	1.5	2.5	1.8
300	1.2	0.5	1.5	0.8	1.7	1.0	2.0	1.3	2.2	1.5	2.5	1.8
350	1.3	0.6	1.5	0.8	1.7	1.0	2.0	1.3	2.3	1.6	2.6	1.9
400	1.4	0.7	1.7	1.0	2.0	1.3	2.3	1.6	2.6	1.9	2.9	2.2
450	1.5	0.8	1.8	1.1	2.2	1.5	2.6	1.9	3.0	2.3	3.4	2.7
500	1.7	1.0	2.1	1.4	2.5	1.8	2.9	2.2	3.4	2.7	3.9	3.2

